


CEI FREE PLAY MOD.  
ALAN DORMAN  
4-12-2020

COMPLEMENTS OF KLAR ELECTRONIC SLOT REPAIR  
[www.slotmachinerepair.com](http://www.slotmachinerepair.com)



If the game has a coin comparator the door has a transformer mounted on the small metal shelf to power the comparator. Remove the transformer. The two wires on the primary of the transformer are 120VAC coin lockout voltage. Mount a 120VAC relay on the shelf (use a relay socket) and connect those two primary wires to the coil of the relay. If the game has a mechanical coin acceptor the two wires on the lockout coil behind it have the 120VAC coin lockout voltage.

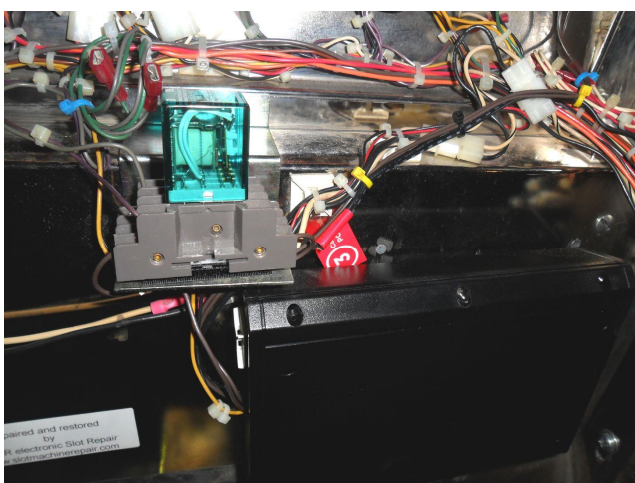

Mount a 12VDC power supply inside the game and plug it into the service outlet inside the game.